




EHROMOLINE

Discover the new range of accessories for high-pressure washing and suction, designed to combine practicality and aesthetics in every professional cleaning environment.

Available in a wide variety of colors, these accessories are ideal for easily distinguishing different users and washing programs, enabling efficient and well-organized operations.

Additionally, this range allows you to match accessory colors with your company's visual identity, adding a touch of style and consistency that aligns perfectly with your brand image.

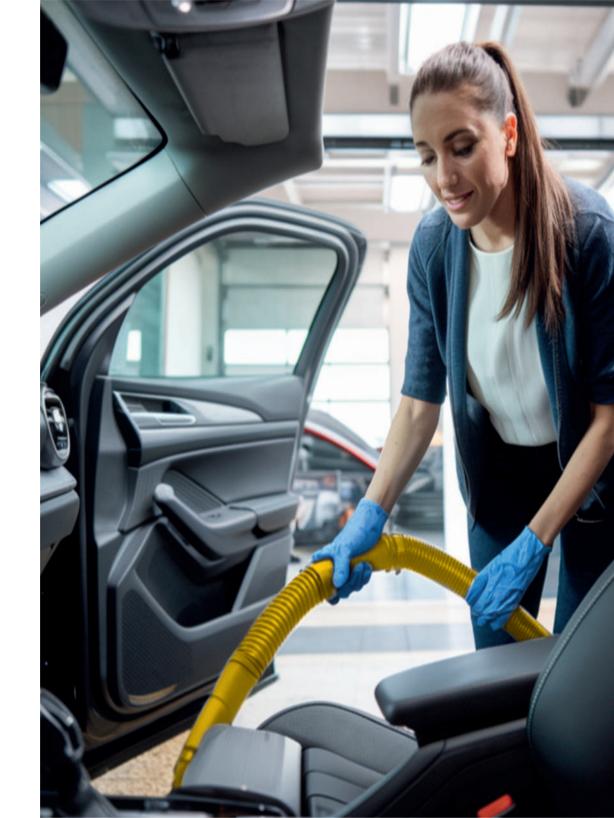



ET10 HIGH-PRESSURE WASH GUN

The ET10 high-pressure wash gun, with a maximum pressure of 280 bar and a flow rate of up to 30 l/min, is ergonomically designed to reduce strain and protect the operator's hand.

Compact and lightweight, it is ideal for washing systems intended for non-professional users as well, such as self-service car wash stations.

Max pressure (bar): 280 Max flow rate (I/min): 30

Body: BRASS

Inlet tube: STAINLESS STEEL

Colours:





PN	COLOUR	INLET	OUTLET
224018000274	RED	G 3/8" F	G 1/4" F
224018000287	RED	G 3/8" M	G 1/4" F
224018000283	RED	sw.STD G 3/8" F*	G 1/4" F
224018000279	RED	sw.STD G 3/8" M*	G 1/4" F
224018000275	BLUE	G 3/8" F	G 1/4" F
224018000288	BLUE	G 3/8" M	G 1/4" F
224018000284	BLUE	sw.STD G 3/8" F*	G 1/4" F
224018000280	BLUE	sw.STD G 3/8" M*	G 1/4" F
224018000277	GREEN	G 3/8" F	G 1/4" F
224018000289	GREEN	G 3/8" M	G 1/4" F
224018000285	GREEN	sw.STD G 3/8" F*	G 1/4" F
224018000281	GREEN	sw.STD G 3/8" M*	G 1/4" F
224018000276	YELLOW	G 3/8" F	G 1/4" F
224018000290	YELLOW	G 3/8" M	G 1/4" F
224018000286	YELLOW	sw.STD G 3/8" F*	G 1/4" F
224018000282	YELLOW	sw.STD G 3/8" M*	G 1/4" F

,	PN	COLOUR	INLET	OUTLET
	224018000291	RED	sw.TOP G 3/8" F*	G 1/4" F
	224018000292	BLUE	sw.TOP G 3/8" F*	G 1/4" F
	224018000293	GREEN	sw.TOP G 3/8" F*	G 1/4" F
	224018000294	YELLOW	sw.TOP G 3/8" F*	G 1/4" F

WEEP. FLOW RATE (L/MIN): 1,1

*SWIVEL INLET

PN	COLOUR	INLET	OUTLET	
224018000295	RED	sw.TOP G 3/8" F*	G 1/4" F	
224018000296	BLUE	sw.TOP G 3/8" F*	G 1/4" F	
224018000297	GREEN	sw.TOP G 3/8" F*	G 1/4" F	
224018000298	YELLOW	sw.TOP G 3/8" F*	G 1/4" F	
Weeping pressu	re (bar): <15			

*SWIVEL INLET

@HROMOLINE



L10 HIGH PRESSURE WASH LANCE

The L10 lance can operate at pressures of up to 310 bar and flow rates of up to 40 I/min. Its plastic handle is molded onto the tube, ensuring exceptional durability even in the event of ground impact.

The L10 performance makes it ideal for use with professional pressure washers.

Max pressure (bar): 310 Max flow rate (I/min): 40 Tube material: STAINLESS STEEL

Colours:

PN	COLOUR	LENGTH (mm)	INLET	OUTLET
224030300097	RED	700	G 1/4" M	G 1/4" M
224030300099	BLUE	700	G 1/4" M	G 1/4" M
224030300098	GREEN	700	G 1/4" M	G 1/4" M
224030300100	YELLOW	700	G 1/4" M	G 1/4" M
224030300101	RED	900	G 1/4" M	G 1/4" M
224030300102	BLUE	900	G 1/4" M	G 1/4" M
224030300103	GREEN	900	G 1/4" M	G 1/4" M
224030300104	YELLOW	900	G 1/4" M	G 1/4" M



PROTECTION

PLASTIC PROTECTION

Plastic protection specially designed to connect the body of the ET10 gun and the handle of the L10 lance, avoiding leaving the brass fitting exposed.

Colours:









COLOUR
RED
BLUE
GREEN
YELLOW



CAR-WASH PISTA

ULTRALIGHT THERMOPLASTIC HOSE FOR CAR-WASH BAYS

Ultra-lightweight hose for car wash booms,

complete with knobs and fittings.

The smooth surface of the hose does not damage the vehicle body in case of impact or abrasion. Made of high-quality polyurethane and thermoplastic elastomer, it offers excellent flexibility and a reduced weight of only 10 g/m.

High resistance to oils, UV rays, ozone, and weather conditions.

Working pressure up to 250 bar.

Inner layer: high-strength polyurethane. Reinforcement: high-strength polyester braid. Cover: transparent polyurethane and thermoplastic elastomer.

Max pressure (bar): 250

Hose material: THERMOPLASTIC

Fittings: G 3/8" FF

Inner diameter (Inch/mm): 1/4 - 6 Outer diameter (mm): 13

Surface: POLISHED

Colours:







1	PN	COLOUR	LENGTH (mm)	FITTINGS MATERIAL
2	CWPI35R	RED	3500	ZINC PLATED STEEL
1	CWPI37R	RED	3700	ZINC PLATED STEEL
Ę	CWPI40R	RED	4000	ZINC PLATED STEEL
LAK-MAN	CWPI42R	RED	4200	ZINC PLATED STEEL
1	CWPI45R	RED	4500	ZINC PLATED STEEL
j	CWPI47R	RED	4700	ZINC PLATED STEEL
3	CWPI50R	RED	5000	ZINC PLATED STEEL
	CWPI55R	RED	5500	ZINC PLATED STEEL
	CWPIR	RED	HOSE SOLD BY TH	E METER AND NOT FITTED
	CWPI35B	BLUE	3500	ZINC PLATED STEEL
	CWPI37B	BLUE	3700	ZINC PLATED STEEL
	CWPI40B	BLUE	4000	ZINC PLATED STEEL
	CWPI42B	BLUE	4200	ZINC PLATED STEEL
	CWPI45B	BLUE	4500	ZINC PLATED STEEL
	CWPI47B	BLUE	4700	ZINC PLATED STEEL
	CWPI50B	BLUE	5000	ZINC PLATED STEEL
	CWPI55B	BLUE	5500	ZINC PLATED STEEL
	CWPIB	BLUE	HOSE SOLD BY THE METER AND NOT FITTED	
	CWPI35V	GREEN	3500	ZINC PLATED STEEL
	CWPI37V	GREEN	3700	ZINC PLATED STEEL
	CWPI40V	GREEN	4000	ZINC PLATED STEEL
	CWPI42V	GREEN	4200	ZINC PLATED STEEL
	CWPI45V	GREEN	4500	ZINC PLATED STEEL
	CWPI47V	GREEN	4700	ZINC PLATED STEEL
	CWPI50V	GREEN	5000	ZINC PLATED STEEL
	CWPI55V	GREEN	5500	ZINC PLATED STEEL
	CWPIV	GREEN	HOSE SOLD BY TH	HE METER AND NOT FITTED
	CWPI35G	YELLOW	3500	ZINC PLATED STEEL
	CWPI37G	YELLOW	3700	ZINC PLATED STEEL
	CWPI40G	YELLOW	4000	ZINC PLATED STEEL
	CWPI42G	YELLOW	4200	ZINC PLATED STEEL
	CWPI45G	YELLOW	4500	ZINC PLATED STEEL
	CWPI47G	YELLOW	4700	ZINC PLATED STEEL
	CWPI50G	YELLOW	5000	ZINC PLATED STEEL
	CWPI55G	YELLOW	5500	ZINC PLATED STEEL
	CWPIG	YELLOW	HOSE SOLD BY TH	HE METER AND NOT FITTED

ALL AVAILABLE ALSO WITH STAINLESS STEEL FITTINGS.



CHROMOLINE



SUPER SPIRAL

SPIRAL HOSE MADE OF RILSAN

The Rilsan spiral hose, ideal for car wash applications, is a flexible hose made of Rilsan® (polyamide 11), a high-performance plastic material known for its resistance to wear, chemicals, and pressure. It is commonly used in car wash systems for connecting guns and lances for spraying.

- · Material Rilsan PAII: offers high resistance to abrasion, oils, and chemical detergents.
- · Spiral structure: provides high elasticity and returns to its original shape, reducing bulk.
- · Flexibility and lightness: makes it easy to use in washing operations.
- · Available colors: provided in vibrant colors to differentiate washing stations and improve safety.

Hose diameter (mm): 8x5 Max pressure (bar): 20 Hose material: RILSAN Fittings material: STAINLESS STEEL

Colours:









PN	COLOUR	LENGTH (m)	FITTINGS
151SRSR08075MX2	RED	7,5	2 X G 1/4" M + SPRING
151SRSR0810MX2	RED	10	2 X G 1/4" M + SPRING
151SRSR0812MX2	RED	12	2 X G 1/4" M + SPRING
151SRSR0815MX2	RED	15	2 X G 1/4" M + SPRING
151SRSR0817MX2	RED	17	2 X G 1/4" M + SPRING
151SRSR0820MX2	RED	20	2 X G 1/4" M + SPRING
151SRSB08075MX2	BLUE	7,5	2 X G 1/4" M + SPRING
151SRSB0810MX2	BLUE	10	2 X G 1/4" M + SPRING
151SRSB0812MX2	BLUE	12	2 X G 1/4" M + SPRING
151SRSB0815MX2	BLUE	15	2 X G 1/4" M + SPRING
151SRSB0817MX2	BLUE	17	2 X G 1/4" M + SPRING
151SRSB0820MX2	BLUE	20	2 X G 1/4" M + SPRING
151SRSV08075MX2	GREEN	7,5	2 X G 1/4" M + SPRING
151SRSV0810MX2	GREEN	10	2 X G 1/4" M + SPRING
151SRSV0812MX2	GREEN	12	2 X G 1/4" M + SPRING
151SRSV0815MX2	GREEN	15	2 X G 1/4" M + SPRING
151SRSV0817MX2	GREEN	17	2 X G 1/4" M + SPRING
151SRSV0820MX2	GREEN	20	2 X G 1/4" M + SPRING
151SRSG08075MX2	YELLOW	7,5	2 X G 1/4" M + SPRING
151SRSG0810MX2	YELLOW	10	2 X G 1/4" M + SPRING
151SRSG0812MX2	YELLOW	12	2 X G 1/4" M + SPRING
151SRSG0815MX2	YELLOW	15	2 X G 1/4" M + SPRING
151SRSG0817MX2	YELLOW	17	2 X G 1/4" M + SPRING
151SRSG0820MX2	YELLOW	20	2 X G 1/4" M + SPRING





FLAT LANCE FOR INDUSTRIAL **VACUUM CLEANERS**

Universal flat lance for industrial vacuum cleaners. Made in Italy.

Material: TECHNOPOLYMER

Colours:

۵	PN
JRE	60151000
2	60151000
ဗ	60151000
FLAT LANCE	60151000

PN	COLOUR	FITTING SIDE (mm)	LENGTH (mm)
6015100000R	RED	38/45	245
6015100000B	BLUE	38/45	245
6015100000V	GREEN	38/45	245
6015100000G	YELLOW	38/45	245

EVAFLEX

VACUUM CLEANER HOSE

EVAFLEX style hose for vacuum cleaners. Diameter: 38 mm.

Designed for optimal durability and high performance, this product guarantees a long lifetime with no internal stress, making it a reliable choice for demanding applications. Its chemical resistance ensures excellent performance even in harsh environments, while the wear and abrasion-resistant construction maintains its integrity over time.

- · Enhanced Durability: Engineered without internal stress, it withstands extensive use for a long lifespan.
- · Chemical-Resistant: Withstands exposure to various chemicals, ensuring reliable operation.
- . Wear and Abrasion-Resistant: Maintains quality despite challenging conditions, reducing the need for replacements.
- · Effortless Handling: Lightweight yet strong, it is easy to maneuver, making powerful vacuum handling simpler.
- · Superior Flexibility: Features a smooth and flexible interior, small bending radius, and crush resistance for easy use in confined spaces.

Perfect for applications where flexibility, strength, and chemical resistance are essential, this product is built to perform.

×	PN	COLOUR	HOSE DIAMETER (mm)	COIL LENGTH (mm)
ï	27059377	RED	38	20
Š	27060066	BLUE	38	20
_	27060065	GREEN	38	20
	27059371	YELLOW	38	20

Material: POLYETHYLENE-EVA

Temperature Range (°C): FROM -25 TO 50 - flexible at low temperature

Colours:







EMILTEC, EMILian TEChnology.

These two words that build our brand, contain the total meaning of our job: promotion and international marketing of the best technolgical performances from our region, Emilia. Emiltec is deeply rooted in the industrial area in the Emilia region.

Thanks to the high quality relationships we have built with our suppliers combined with our team technical and commercal skills, we are able to offer not only high quality products with competitive prices but also consulting and support in choosing the right solutions following the customer's specific needs and requirements.

The products we offer are used mainly in areas related to the high pressure water cleaning and jetting. Many Emilian manufacturing companies work in this field, but only some of them have been keeping their authentic identity during the years:

MADE-IN-ITALY engineering and production.

These companies represent Emiltec's partners today.

We are aware we can count on high quality products and excellent service, readiness in exchanging information between customers and suppliers and, not least, our warehouse location: in the centre of a highly industrial area where every kind of product can be obtained, these are the reasons why we are looking confidently ahead.

Future is about to bring important challenges for the whole Italian industrial system and we feel proud of being part of it.



EMILTEC srl Via Boetti, 8/B · 42124 Reggio nell'Emilia · Italy Tel +39.0522.941825 · Fax +39.0522.1601370

info@emiltec.com www.emiltec.com

